

SAYTEX ALERO®

Optima™

CAS Number

88497-56-7

EINECS/EC

Molecular Formula

DESCRIPTION

SAYTEX ALERO® Optima™ is a versatile polymeric flame retardant designed for use in thermoplastic formulations. Its polymeric structure provides formulation flexibility across a range of processing conditions while helping manufacturers achieve required fire safety performance.

SAYTEX ALERO Optima supports customizable material properties with demonstrated recyclability. Depending on the resin system and formulation, it can provide efficient flame retardant performance and good appearance while supporting antimony trioxide-reduced or antimony trioxide-free formulations.

APPLICATIONS


SAYTEX ALERO Optima is targeted at a wide range of thermoplastics and foams applications including HIPS, ABS, PE, PP and PC/ABS. Its unique chemistry imparts favorable overall mechanical and physical properties.


FEATURES & BENEFITS

SAYTEX ALERO Optima flame retardant is in white powder form containing 72-73% bromine. No EPA Significant New Use Rule (SNUR) currently applies to SAYTEX ALERO Optima. Depending on the application, it is easily melt-blendable, returns high melt flow and provides excellent thermal and color stability while retaining high gloss and impact strength.

PHYSICAL PROPERTIES

Property	Value
Appearance/Form	White Powder, PST
% Bromine	~72-73
Specific gravity (23 °C)	~2.3
Glass transition temperature (°C)	~130-140
TGA (TA Instruments, model Q500, 10 °C/min under N₂)	
1% weight loss, °C	343
5% weight loss, °C	384
10% weight loss, °C	395
Solubility (wt. % at 25 °C)	
Water	< 0.01
Acetone	< 2
Methanol	<0.01
Toluene	~78

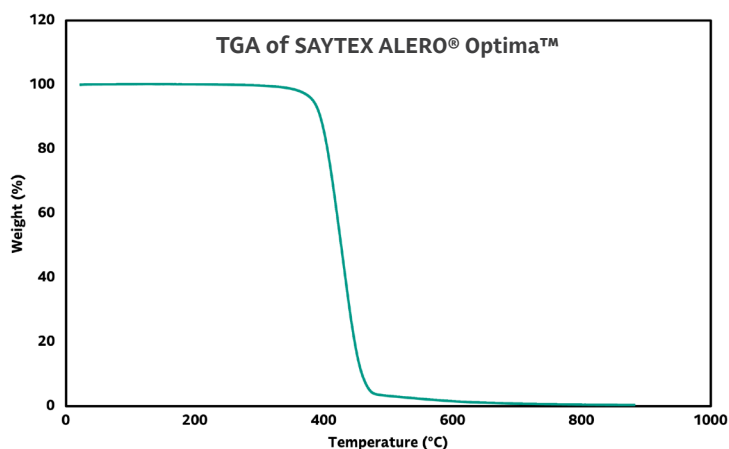

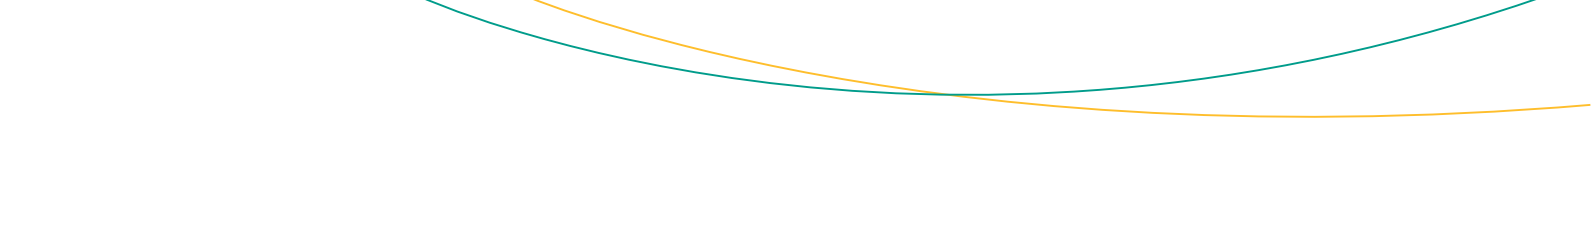

The information presented herein is believed to be accurate and reliable, but is presented without guarantee or responsibility on the part of Albemarle Corporation and its subsidiaries and affiliates. It is the responsibility of the user to comply with all applicable laws and regulations and to provide for a safe workplace. The user should consider any health or safety hazards or information contained herein only as a guide, and should take those precautions which are necessary or prudent to instruct employees and to develop work practice procedures in order to promote a safe work environment. Further, nothing contained herein shall be taken as an inducement or recommendation to manufacture or use any of the herein materials or processes in violation of existing or future patent.

Technical data sheets may change frequently. You can download the latest version from our website www.albemarle.com.

Please contact us at www.albemarle.com/contact with questions.

© 2026 by Albemarle Corporation. All rights reserved. The Albemarle logo, SAYTEX ALERO and SAYTEX ALERO Optima are registered trademark of Albemarle Corporation.

